

Bone Fracture Repair: Testing Porous Properties of Calcium Phosphate Bioactive Cement and How it Compares to Pig Bone

GENESEO
THE STATE UNIVERSITY OF NEW YORK

Ivanoski Dean, Donaldson Jack, Chudy Matthew, Islam Nobah,
Rennells Emily, Gikonyo Barnabas
Chemistry Department, SUNY Geneseo, Geneseo, NY. 14454


GENESEO
THE STATE UNIVERSITY OF NEW YORK

Abstract

Autografting is the most effective method used for supplementing and replacing bone. Autografting is a risky procedure because of its invasive nature. When performing the procedure of autografting, one needs to remove small sections of bone to use as a stimulant at the fracture site. This study is made to design an alternative method to replace autografting. In our study, we used pig fibula as a model to compare the properties of our novel cement which is Calcium Phosphate based. Calcium Phosphate Cement (CPC) is ideal because it is a biocompatible bone substitute composed of Hydroxyapatite (HA), which constitutes a major component of human bone. The Hydroxyapatite will serve as the base ingredient for the cement. The cement allows for the successful osseointegration and the initiation of bone growth. This term, our efforts were focused on exploring various drying methods that would produce cement with the greatest integrity. The method of drying that yielded the cement with the greatest integrity included heating, to simulate body temperature, followed by the addition of a layer of water as well as parafilm covering before being left to dry.

Introduction

Fractures can only heal under certain conditions such as, a proper cellular environment, a porous matrix and mechanical strength¹. This study introduces a chemically modified Calcium Phosphate Cement (CPC) which is a bone substitute that replace the need of an autograft². Hydroxyapatite based cement will be used in this project as a bone substitute because of its ability to form a moldable cement, along with it being naturally found in human bone. The goal of this study is to attempt to create a system that satisfies all of the conditions needed for proper union with the use of a cement polymer/resin system. Chitosan, sodium bicarbonate, and hydroxyapatite are materials that have qualities that may increase the rate of the healing process. Chitosan has qualities that interlock and form pores in the cement that show porosity similar to pig bone³. Pores in calcium phosphate materials are necessary for bone tissue formation because they allow migration and proliferation of osteoblasts and are expected to enhance osteogenesis. Different concentrations of chitosan and sodium bicarbonate sample cements will be examined to take a closer look at how porosity and pore size works to increase the rate of the healing process during bone formation.

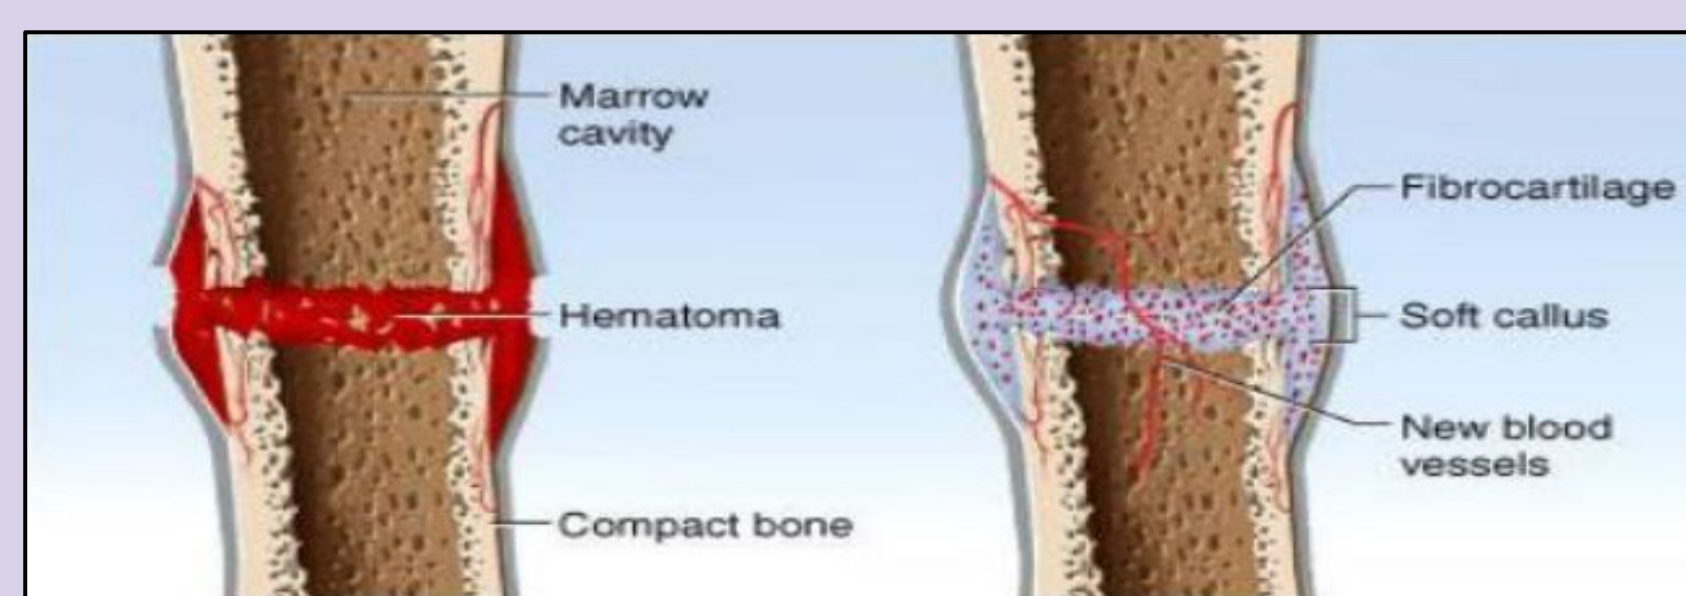

Experimental Procedure

I. Preparation of the Pig Fibula

Pig fibula was obtained, being most similar to bone, and boiled to remove bacteria and set to dry. Bone samples were made by sawing and sanding to 11mm in length and 0.5 mm in height.



Figure 1: Pig fibula bone at 11mm.

II. Synthesis of Sodium Bicarbonate-Hydroxyapatite Cement

Three cement samples were made at 20% sodium bicarbonate mixed with hydroxyapatite, distilled water and dental solvent. These samples were then dried overnight and modified to fit on SEM mounting.

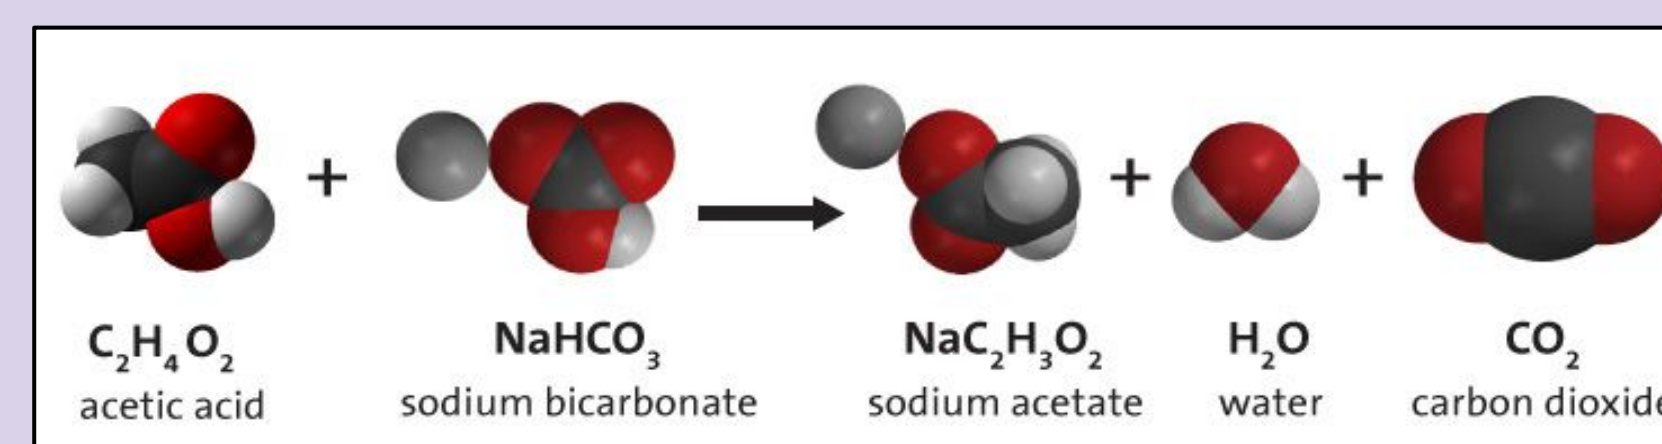


Figure 2: Equation of sodium bicarbonate combined with acetic acid

III. Synthesis of Chitosan-Hydroxyapatite Cement

Five cement samples of 5%, 10%, 15% 20% chitosan cement samples mixing hydroxyapatite, distilled water and 1% (w/w) citric acid. Similarly to the previous procedure, the samples were dried overnight and modified to be mounted for SEM

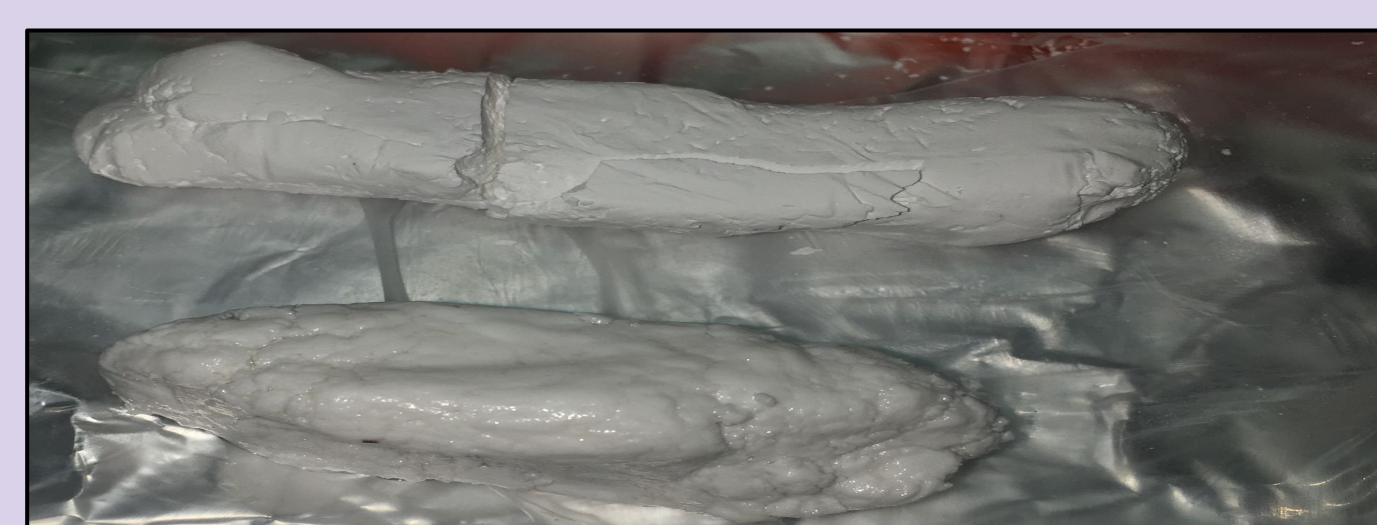


Figure 3: (Top) Chitosan cement sample completely dried, (Bottom) Chitosan cement sample still drying

IV. SEM Images of Cement Samples

The cross-section of the cements, Sodium bicarbonate and Chitosan, were mounted. The scanning electron microscope was able to capture images of the cement and pore sizes were able to be analyzed.

Results

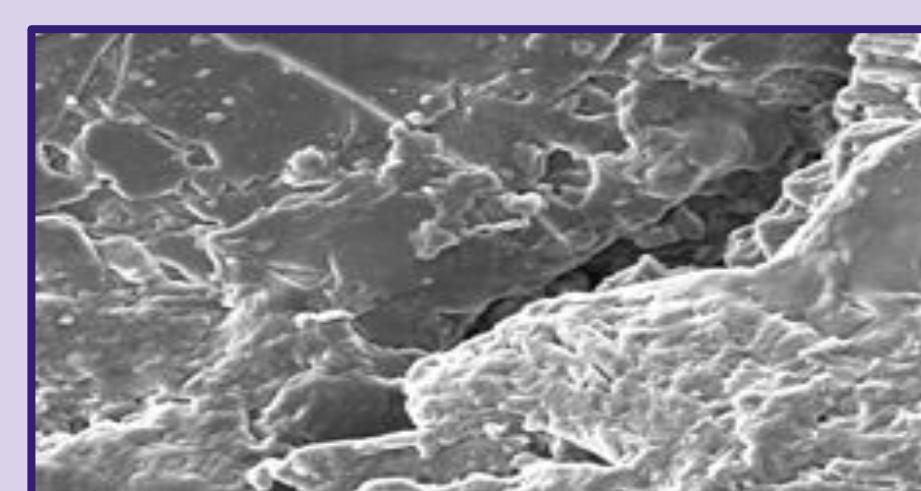


Figure 4a: Chitin

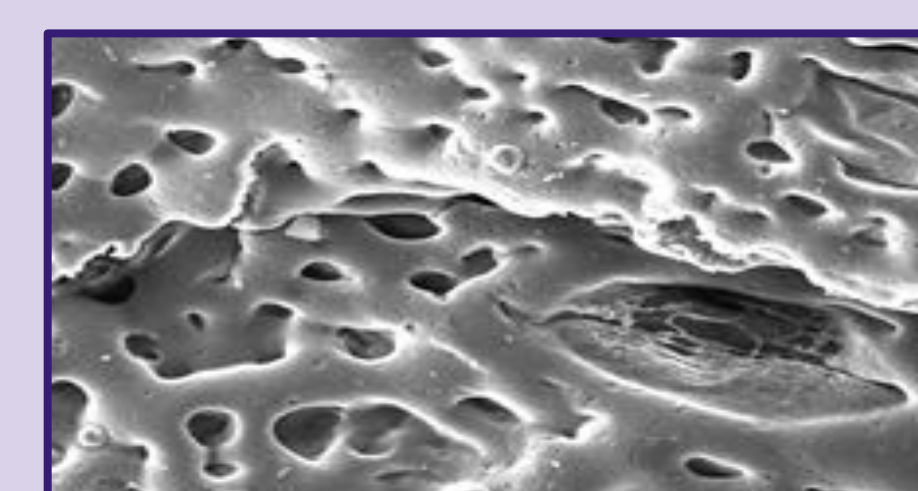


Figure 4b: Chitosan, a chitin derivative

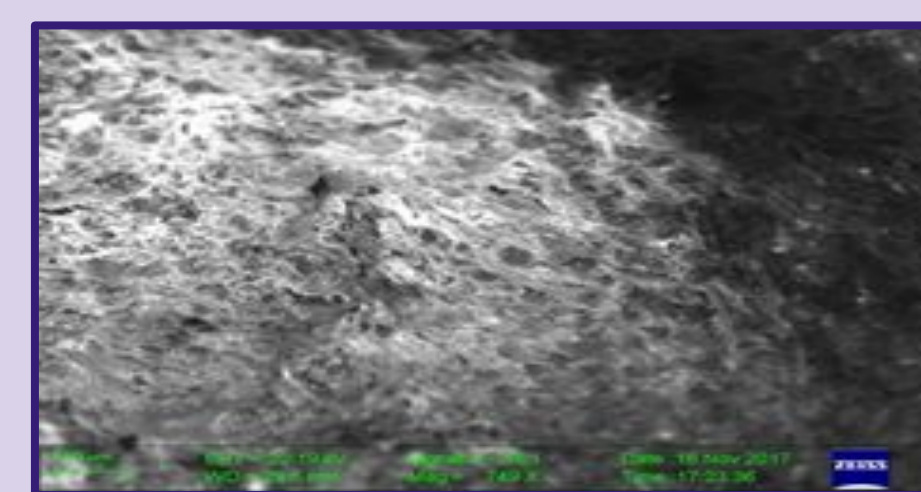


Figure 5a: Sodium Bicarbonate (3.05kx Magnification)

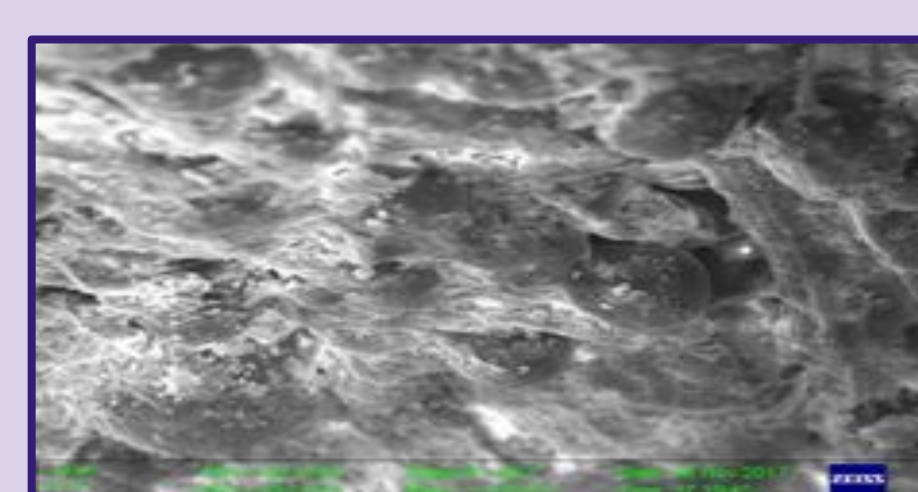


Figure 5b: Sodium Bicarbonate ((79x Magnification)

Discussion

Samples of chitosan and sodium bicarbonate cements were used in experiments to test for a porosity similar to bone. From the sodium bicarbonate samples, (Figure 5a) using the bone sample as the standard comparison for all pore sizes, it was determined that the most similar pore size at magnification of 200x was hydroxyapatite. The standard pore size of the bone at 200x was 10 μm and with hydroxyapatite was 6μm. The significance of this finding shows that using more hydroxyapatite in the cement sample can increase the size of the pores and produce a more adequate sample that allows for a more integrative environment in which bone-inducing cells can move across these pores to speed up the normal bone healing process. SEM results showed a coarse surface structure that resulted from the experimental chemical being cross-linked to hydroxyapatite during the growth process. This may provide a conducive condition for adhesion and growth of biological tissues. Porous hydroxyapatite is safe, reliable, and biocompatible for use in the host. Previous studies report that porosity, combined with a bioactive material, such as HA, can have a synergistic effect and may contribute to improvements in material colonization by cells

Future Directions

In the future, we will be experimenting with a different composition of Hydroxyapatite and Citric Acid that has shown promising strength and durability according to a previous research group. Increased strength is important as it can allow for greater use of the affected area or limb while the bone is healing. There are several different properties to examine with this cement, such as porosity, viscosity, and its ability to foster the colonization of new bone cells. The first step will be focused on determining a consistent formula for the creation of the cement for future research, so that ourselves, as well as other researchers can study the properties of this new cement.

References

- ¹Arcos D, Vallet-Regí M (2013) Bioceramics for drug delivery, *Acta Materialia*, 61:890-911. Print.
- ²Aryaei, Ashkan, et al. Cross-Linked Chitosan Improves the Mechanical Properties of Calcium Phosphate Chitosan Cement. *Materials Science and Engineering*: 54 (2015): 14-19. Print
- ³Yu, Wei, Wang, Xixin et al. Preparation and mechanical properties of reinforced hydroxyapatite bone cement with nano-ZrO₂. *Ceramics International*. 9.41 (2015): 10600-10606. Print.
- ⁴Kim, S.B. et al. The Characteristics of a hydroxyapatite-chitosan-PMMA bone cement. *Biomaterials*.25.26 (2004): 5715-5723. Print.
- ⁵Ishikawa, K. Takagi, S. et al. (1995) Properties and mechanisms of fast setting calcium phosphate cements. *J. Mater Med*. 6:528. Print.
- ⁶Misra, D.N., Bowen, R.L.: (1977)Adhesive bonding of various materials to hard tooth tissues. XI: Chemisorption of an adduct of the diglycidyl ether of bisphenol A with N-phenylglycine on hydroxyapatite, *J. Phys. Chem*.81: 942-946. Print.
- ⁷Ezoddini-Ardakani, Fatemeh et al. "Histologic Evaluation of Chitosan as an Accelerator of Bone Regeneration in Microdrilled Rat Tibias." *Dental Research Journal* 9.6 (2012): 694-699. Print.

Acknowledgements:

The authors gracefully thank our faculty sponsor Barnabas Gikonyo and acknowledge financial support from Office of Sponsored Research and the Chemistry Department.